



Model : LED Flex Light 1615




Model : SL-NF1615
 Material : Silicone resin
 Dimension : 16 x 15 mm.
 Lighting direction : Top luminous
 PCB Width : 11mm.
 Beam Angle : 180°
 Minimum bend diameter : 100mm.
 Environment : Indoor / Outdoor
 Available Lengths : Custom cut
 Color : 2700K / 3000K / 3500K / 4000K / 5500K / 6500K / 6500K / 9000K / CCT / CCT-RGB
 CRI (Ra) : ≥ 80
 Input Voltage : DC 12V, 24V / AC 220V
 Power : 3w / 6w / 9w / 12w / 14.4w
 Lumens/m : 275 / 550 / 825 / 1100 / 1320
 IP Rating : IP65
 Warranty : 2 years
 Vendor : @lightfeel
 Control System Options : Dimmer / / /



Clip size(mm)



Optional Accessories:




Model : LED Flex Light 1616

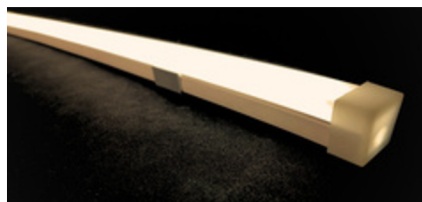


Model : SL-NF1616
 Material : Silicone resin
 Dimension : 16 x 16 mm.
 Lighting direction : Top luminous
 PCB Width : 10mm.
 Beam Angle : 180°
 Minimum bend diameter : 100mm.
 Environment : Indoor / Outdoor
 Available Lengths : Custom cut
 Color : 2700K / 3000K / 3500K / 4000K / 5500K / 6500K / 6500K / 9000K / CCT / CCT-RGB
 CRI (Ra) : ≥ 80
 Input Voltage : DC 12V, 24V / AC 220V
 Power : 3w / 6w / 9w / 12w / 14.4w
 Lumens/m : 275 / 550 / 825 / 1100 / 1320
 IP Rating : IP65
 Warranty : 2 years
 Vendor : @lightfeel
 Control System Options : Dimmer / / /



Clip size(mm)



Optional Accessories:




Model : LED Flex Light 0515





Model : SL-NF0515
 Material : Silicone resin
 Dimension : 5 x 15 mm.
 Lighting direction : Top luminous
 PCB Width : 10mm.
 Beam Angle : 120°
 Minimum bend diameter : ≥ 60 mm
 Environment : Indoor / Outdoor
 Available Lengths : Custom cut
 Color : 2700K / 3000K / 3500K / 4000K / 5500K / 6500K / 6500K / 9000K / CCT / CCT-RGB
 CRI (Ra) : ≥ 80
 Input Voltage : DC 12V, 24V / AC 220V
 Power : 3w / 6w / 9w / 12w / 14.4w
 Lumens/m : 275 / 550 / 825 / 1100 / 1320
 IP Rating : IP65
 Warranty : 2 years
 Vendor : @lightfeel
 Control System Options : Dimmer / / /


Clip size(mm)



Optional Accessories:




Model : LED Flex Light 1220

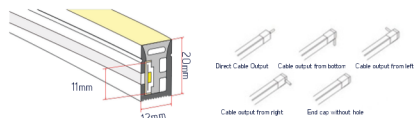


Model : SL-NF1220
 Material : Silicone resin
 Dimension : 12 x 20 mm.
 Lighting direction : Side luminous
 PCB Width : 11mm.
 Beam Angle : 180°
 Minimum bend diameter : 100mm.
 Environment : Indoor / Outdoor
 Available Lengths : Custom cut
 Color : 2700K / 3000K / 3500K / 4000K / 5500K / 6500K / 6500K / 9000K / CCT / CCT-RGB
 CRI (Ra) : ≥ 80
 Input Voltage : DC 12V, 24V / AC 220V
 Power : 3w / 6w / 9w / 12w / 14.4w
 Lumens/m : 275 / 550 / 825 / 1100 / 1320
 IP Rating : IP65
 Warranty : 2 years
 Vendor : @lightfeel
 Control System Options : Dimmer / / WIZ

Clip size(mm)



Optional Accessories:




Model : LED Flex Light 0816




Model : SL-NF0816
 Material : Silicone resin
 Dimension : 8 x 16 mm.
 Lighting direction : Side luminous
 PCB Width : 8mm.
 Beam Angle : 180°
 Minimum bend diameter : ≥ 60 mm
 Environment : Indoor / Outdoor
 Available Lengths : Custom cut
 Color : 2700K / 3000K / 3500K / 4000K / 5500K / 6500K / 6500K / 9000K / CCT / CCT-RGB
 CRI (Ra) : ≥ 80
 Input Voltage : DC 12V, 24V / AC 220V
 Power : 3w / 6w / 9w / 12w / 14.4w
 Lumens/m : 275 / 550 / 825 / 1100 / 1320
 IP Rating : IP65
 Warranty : 2 years
 Vendor : @lightfeel
 Control System Options : Dimmer / / WIZ


Clip size(mm)



Optional Accessories:




Model : LED Flex Light 1818

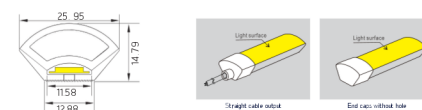

Model : SL-NF1818
 Material : Silicone resin
 Dimension : 26 x 15 mm.
 Lighting direction : Triangle luminous
 PCB Width : 12mm.
 Beam Angle : 180°
 Minimum bend diameter : 100mm.
 Environment : Indoor / Outdoor
 Available Lengths : Custom cut
 Color : 2700K / 3000K / 3500K / 4000K / 5500K / 6500K / 6500K / 9000K / CCT / CCT-RGB
 CRI (Ra) : ≥ 80
 Input Voltage : DC 12V, 24V / AC 220V
 Power : 3w / 6w / 9w / 12w / 14.4w
 Lumens/m : 275 / 550 / 825 / 1100 / 1320
 IP Rating : IP65
 Warranty : 2 years
 Vendor : @lightfeel
 Control System Options : Dimmer / / WIZ

Clip size(mm)



Optional Accessories:

