LF-GCV350H24-YH

Application

เหมาะสำหรับใช้งานกับระบบไฟ LED ภายในอาคาร เช่น ไฟเส้น LED (LED Strip) งานไฟซ่อนฝ้า ไฟตู้โชว์ หรือ
ไฟตกแต่งที่ต้องการแหล่งจ่ายไฟที่มีประสิทธิภาพและความเสถียรในการทำงาน
รองรับกำลังไฟเต็มตามสเปค พร้อมระบบป้องกันไฟลัดวงจร โอเวอร์โหลด และโอเวอร์โวลต์ สามารถ ปรับสเตปกำลังไฟผ่าน DIP Switch และเลือกฟังก์ชัน Soft-Start ได้ ช่วยให้การจ่ายไฟเหมาะกับโหลดของแต่ละโปรเจกต์



Specification

Optical Data

Output Voltage	24V
Power Rating	350W
AC Input Voltage	AC 220-240V
Frequency (Hz)	50/60Hz
DC Output Voltage	24V ±2%
Output Current	0-14.6A
Step Dimming	35% / 50% / 75% / 100%
Body	Iron Grey
Degree of protection	IP20
Working Indicator	Yes
Dimension	210*59.2*35.5 mm (LWH)
Efficiency (Max.)	≥93%

Dimensions

Power supply size(mm)

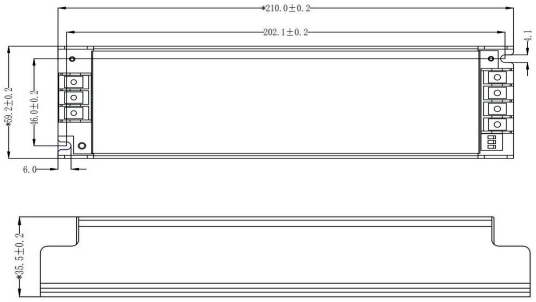

Product terminal

Input		Output	
L	AC live wire input	V+	Positive terminal output of LED driver
N	AC neutral wire	V+	Positive terminal output of LED driver
⏚	input Earth wire	V-	Negative terminal output of LED driver
		V-	Negative terminal output of LED driver

DIP switch definition

Output power	DIP switch 1	DIP switch 2	DIP switch 3
*100%	-	-	ON (Soft-start function activated)
75%	-	ON	
50%	ON	-	*- (Soft-start function inactivated)
35%	ON	ON	

