



SL-NF1220

Material	: Silicone resin.
Distribution	: 20x12mm.
PCB width	: 11mm.
Beam Angle	: 180°
Minimum bend diameter	: 100mm.
Available Lengths	: 50m(5m/10m/20m are available).
IP Rating	: IP67
Working Temperature	: -20 to 20°C
N.W.(G/M)	: 275
Weight(g/m)	: 195
CCT	: 2700K-6000K / CCT / RGBW / RGB+CCT
Input Voltage(V)	: DC 12V-24V / AC 220V





SL-NF1616

Material	: Silicone resin.
Distribution	: 16x16mm.
PCB width	: 10mm.
Beam Angle	: 180°
Minimum bend diameter	: 100mm.
Available Lengths	: 50m(5m/10m/20m are available).
IP Rating	: IP67
Working Temperature	: -20 to 20°C
N.W.(G/M)	: 210
Weight(g/m)	: 195
CCT	: 2700K-6000K / CCT / RGBW / RGB+CCT
Input Voltage(V)	: DC 12V-24V / AC 220V



SL-NF1818

Material	: Silicone resin.
Distribution	: 26x25mm.
PCB width	: 12mm.
Beam Angle	: 180°
Minimum bend diameter	: 100mm.
Available Lengths	: 50m(5m/10m/20m are available).
IP Rating	: IP67
Working Temperature	: -20 to 20°C
N.W.(G/M)	: 200
Weight(g/m)	: 195
CCT	: 2700K-6000K / CCT / RGBW / RGB+CCT
Input Voltage(V)	: DC 12V-24V / AC 220V

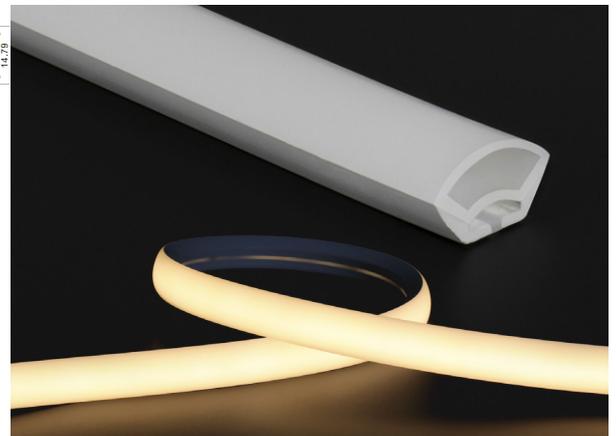

ND26

Material	: Silicone resin.
Distribution	: 20x12mm.
PCB width	: 11mm.
Beam Angle	: 180°
Minimum bend diameter	: 100mm.
Available Lengths	: 50m(5m/10m/20m are available).
IP Rating	: IP67
Working Temperature	: -20 to 45°C
Storage Temperature	: -20 to 60°C
Weight(g/m)	: 528
CCT	: 2700K-6000K / CCT / RGBW / RGB+CCT
Input Voltage(V)	: DC 12V-24V / AC 220V

