

# LED STRIPS




12W | 24Vdc | 120LEDs | 8mm | IP20

Light **FEEL**



## SPECIFICATIONS

Part #	FHW007A2
Input Voltage	12V / 24V
Input Current	0.5A/1m
Power	Typ. 12W/m
Lumens /m	1200Lm@4000K
CRI(Ra)	80
Beam Angle	90°
Cutting Unit	B=50mm / 6LEDs
Dimension	A= 8.33mm C=8mm D=1.2mm
Copper Foil	2ounce
Dimmable	PWM & 1-10V
Temp. Range	-25° ~ 55° / -13°F ~131°F
ErP/ EEC	F

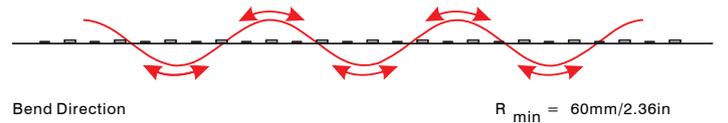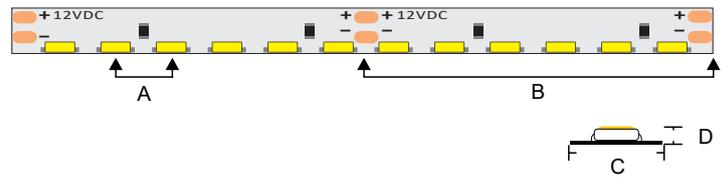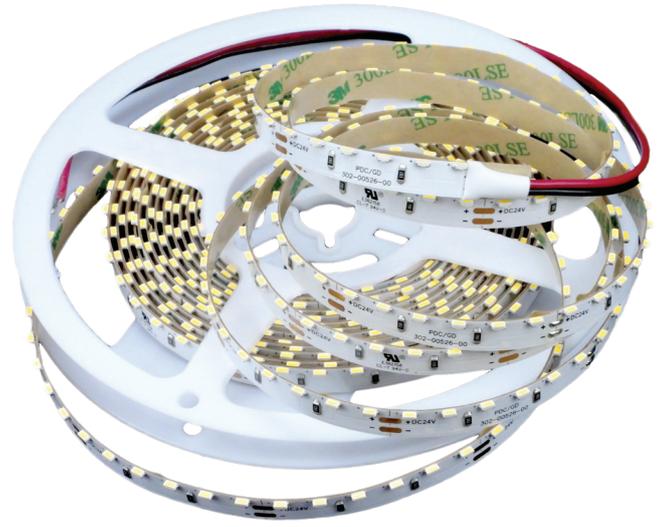

## PRODUCT FEATURES

- \* 3014 side view LED
- \* 5 SDCM , one Bin Only
- \* 80 CRI
- \* 35,000 Hour Life
- \* 2 - Year Warranty
- \* CE RoHS Approved

## PACKING INFO.

5mts / Roll	300mts / Carton	G.W : 7.2kgs
Carton Size: 45*25*26cm		CBM 0.0323

## COLOR TEMPERATURE (KELVIN)



## NOTES:

1. The given data are typical value, due to tolerances of the production process and electrical components, values for light output can be  $\pm 10\%$  and electrical power can be  $\pm 10\%$ . Measurement uncertainty  $\pm 5\%$ . Values given for 1 m LED Strips.

2. Heat sinking measures must be taken if the power above 16W/m.

\* GKL RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

