





05 DC48V CURVED LINEAR TRACK LIGHTING SYSTEM

DC48V CURVED LINEAR TRACK LIGHTING SYSTEM

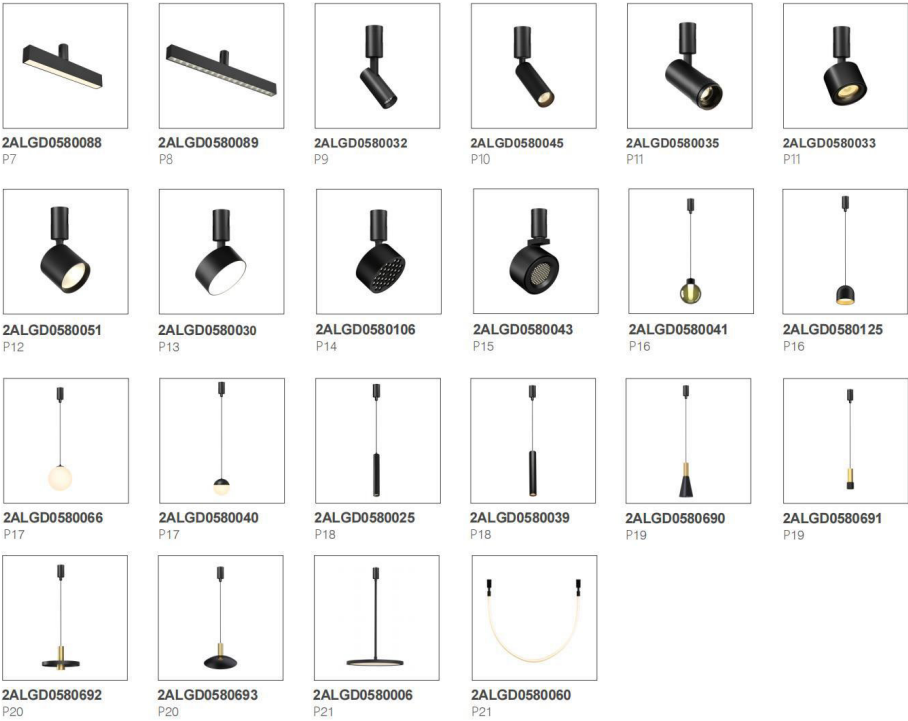

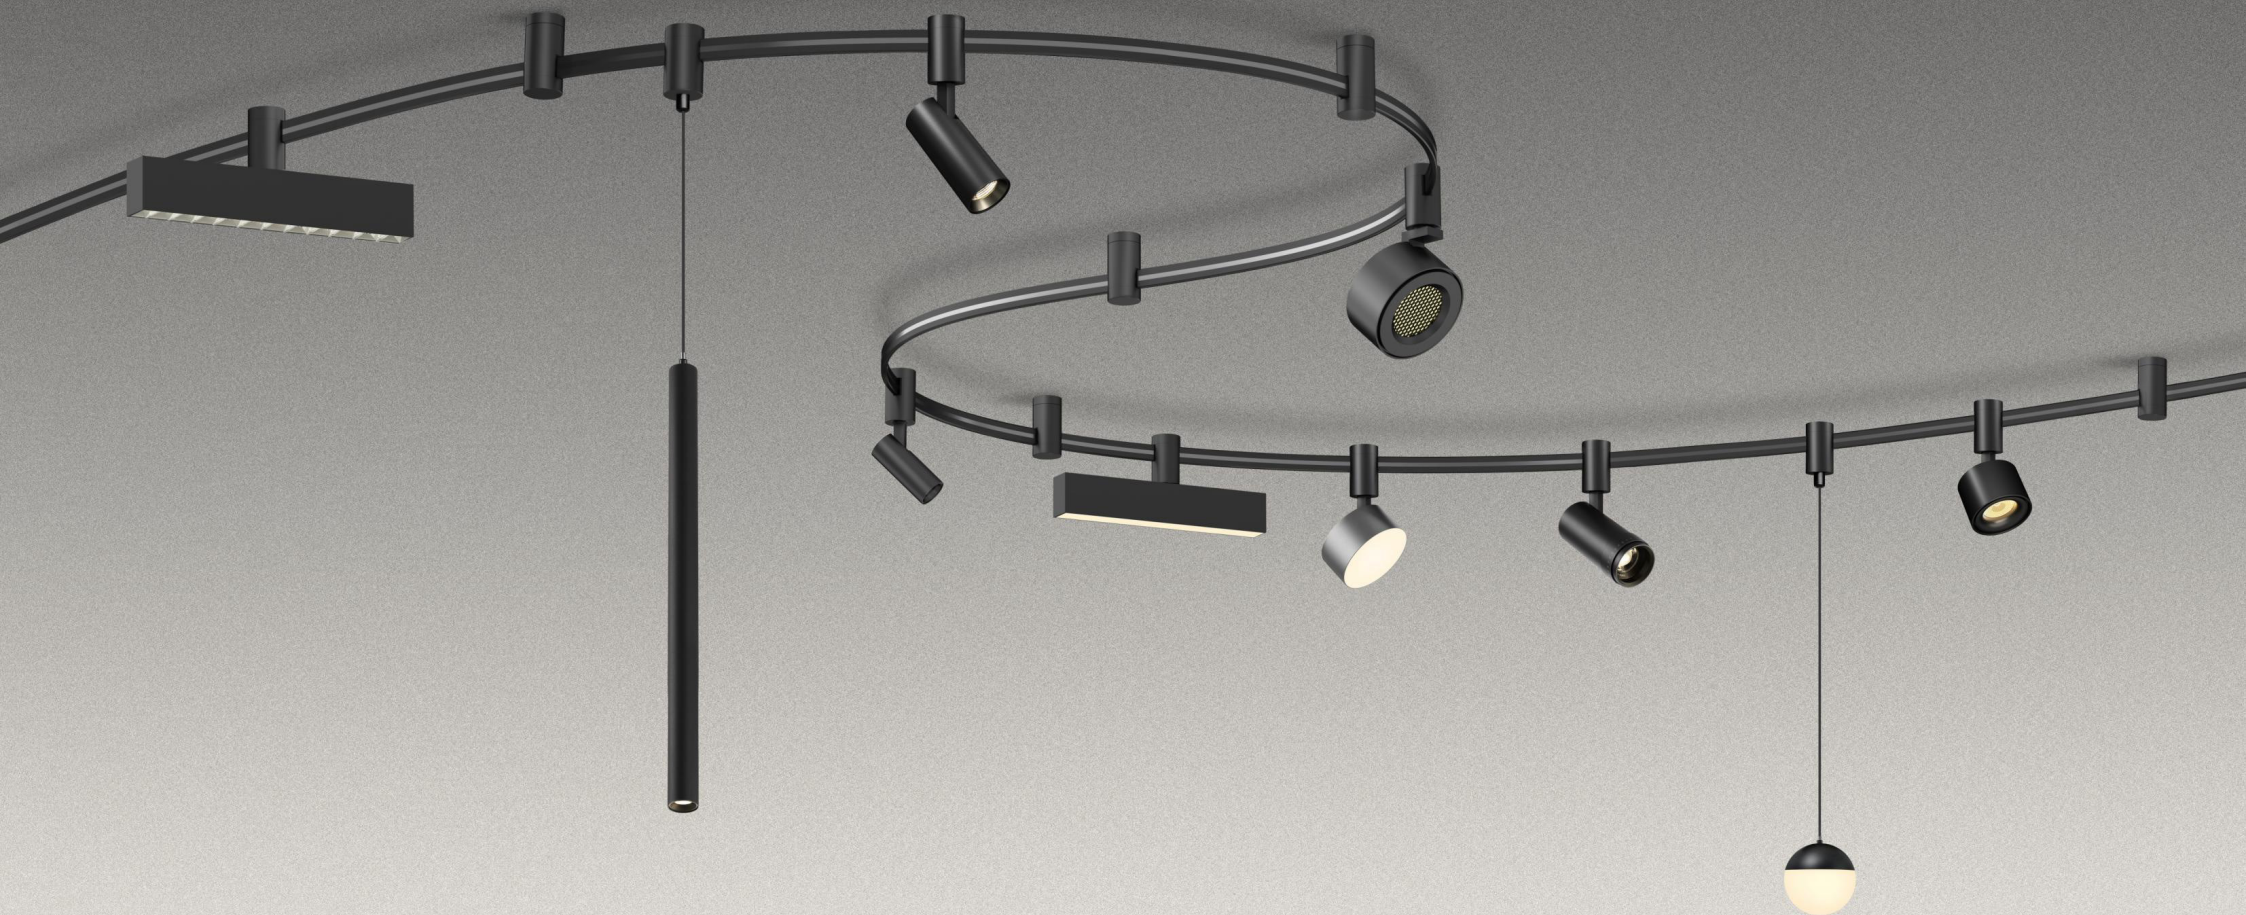


CE IP20 48VAC



DIM TRIAC



DIM 0-10V



DALI




ZigBee®



Bluetooth

DC48V Curved Linear Track Lighting System

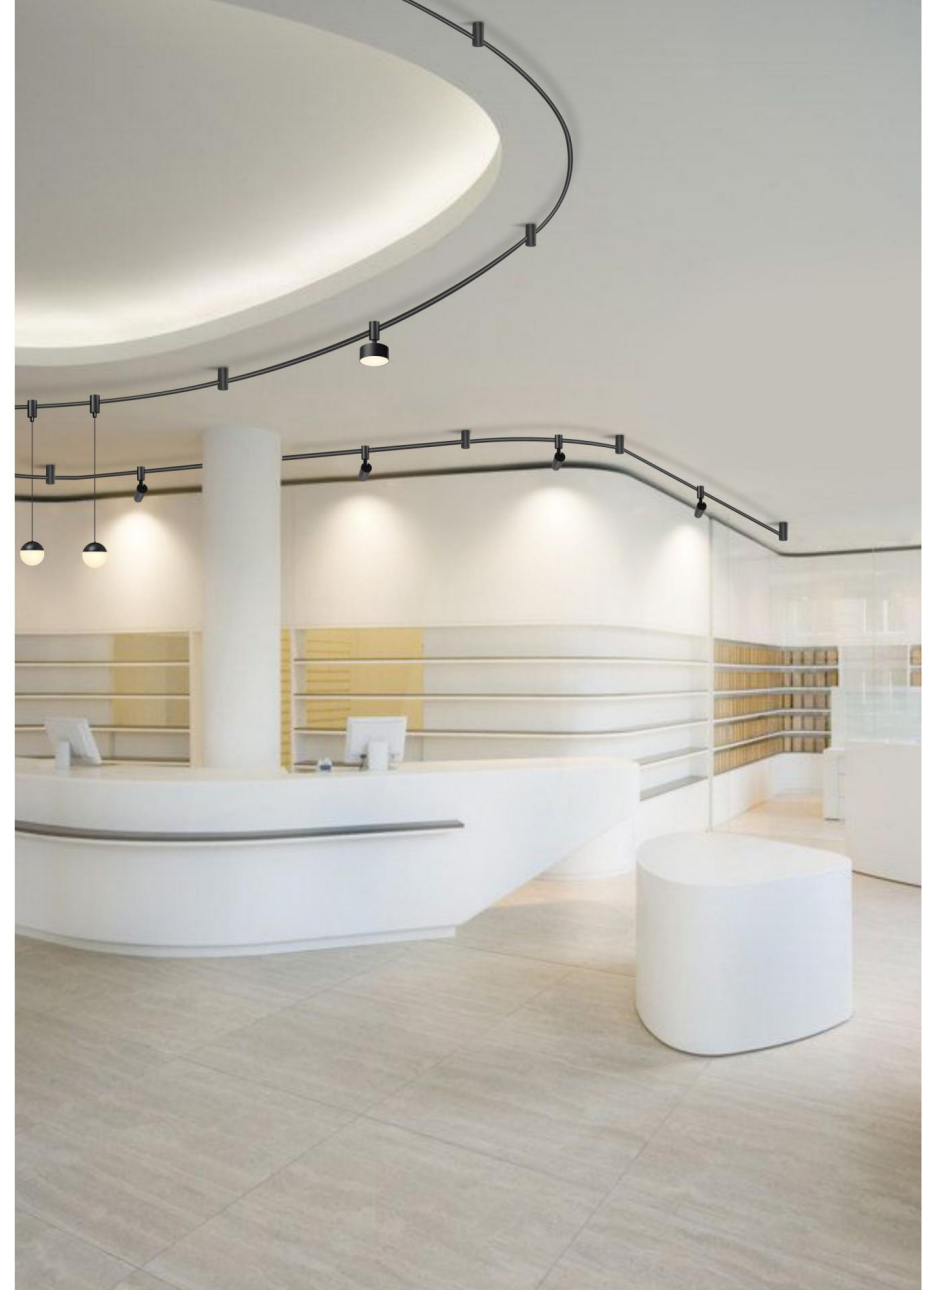

ACCESSORIES

05 Series Track Rail & Accessories




Curved Track Rail

2C3TT0006-2L-20M

20 meter

Black




Curved Track Rail

2C3TT0007-4L-20M

20 meter


Black



Track Rail Bracket

2C3GDT0501

Black



05 Series Power Supply




Power Supply

2C1QD0315-100W

Input Voltage: AC85-264V
Output Voltage: DC48V
Output Current: 0~2.3A

Size
Ø110*H100mm

Black




Power Supply

2C1QD0315-200W

Input Voltage: AC90~132V/AC180~264V select by switch
Output Voltage: DC48V
Output Current: 0~4.4A


Size
Ø132*H100mm

Black



POWER SUPPLY

05 Series External Power Supply



Meanwell Power Supply

2C1QD0005-100W

Input Voltage: AC85-264V
Output Voltage: DC48V
Output Current: 0~2.3A

Size
L129*W97*H30mm



Meanwell Power Supply

2C1QD0007-200W

Input Voltage: AC90~132V/AC180~264V select by switch
Output Voltage: DC48V
Output Current: 0~4.4A

Size
L215*W115*H30mm



Meanwell Power Supply

2C1QD0008-350W

Input Voltage: AC90~132V/AC180~264V select by switch
Output Voltage: DC48V
Output Current: 0~7.3A

Size
L215*W115*H30mm



TUYA ZIGBEE EQUIPMENT



Optional



Wireless Panel Tuya Zigbee
2C1YK0009

Size
86*86mm



Wired Panel Tuya Zigbee
2C1YK0010

Size
86*86mm



Remote Control Tuya Zigbee
2C1YK0020

Size
155*45*10mm



4" Smart Screen Tuya ZigBee
2C1YK0027



8" Smart Control Screen Tuya ZigBee
2C1YK0021

Size
390*355*230mm



Bluetooth Panel
2C1YK0026

Size
86*86*6mm

Essential



Wireless Getway Tuya ZigBee
2C1YK0022

Size
62*62mm




Wired Contror Tuya ZigBee
2C1YK0023

Size
62*62mm




2ALGD0580088-12W 

POWER: 12W
CRI: 90
LUMEN: 918lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: L257*W26*H32mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White




2ALGD0580088-18W 

POWER: 18W
CRI: 90
LUMEN: 1369lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: L382.5*W26*H32mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



2ALGD0580088-24W 

POWER: 24W
CRI: 90
LUMEN: 1813lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: L509*W26*H32mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS

 ON/OFF

 DIM TRAC

 DIM 0-10V

 DALI

 ZigBee

 Bluetooth

RECOMMEND OTHER VERSIONS

 ON/OFF

 DIM TRAC


 DIM 0-10V

 DALI

 ZigBee


 Bluetooth

2ALGD0580088-12W



ANGLE 110°

12W 110° 4000K




12W 110° 4000K

Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	354.63	2.81/2.59	5.7	69.55
1.6	138.53	4.50/4.14	14.6	27.17
2.0	88.66	5.62/5.18	22.9	17.39
2.5	59.08	6.88/6.34	34.3	11.59
3.0	39.40	8.43/7.76	51.5	7.73


Dv Beam Angle(B): H109.1 V104.6 Field angle(F): H163.8 V156.9

2ALGD0580088-18W



ANGLE 110°

18W 110° 4000K



18W 110° 4000K


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	526.58	2.85/2.60	5.8	102.08
1.6	205.70	4.56/4.16	15.0	39.87
2.0	131.85	5.70/5.20	23.4	25.51
2.5	87.73	6.99/6.37	35.1	17.00
3.0	58.51	8.56/7.81	52.6	11.34

Dv Beam Angle(B): H108.9 V104.9 Field angle(F): H164.2 V157.1

COLOR FINISHINGS:




2ALGD0580088-24W



ANGLE 110°

24W 110° 4000K



24W 110° 4000K


Dist(m)	Enadir(lx)	Dh/Dv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	692.71	2.83/2.59	5.8	135.07
1.6	270.59	4.53/4.15	14.8	52.76
2.0	173.18	5.66/5.19	23.1	33.77
2.5	115.40	6.93/6.36	34.7	22.50
3.0	76.97	8.49/7.78	52.0	15.01

Dv Beam Angle(B): H109.3 V104.8 Field angle(F): H164.1 V157.1




2ALGD0580089-12W

POWER: 12W
CRI: 90
LUMEN: 882lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: L257*W26*H32mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: Black/White




2ALGD0580089-18W

POWER: 18W
CRI: 90
LUMEN: 1315lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: L382.5*W26*H32mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: Black/White



2ALGD0580089-24W

POWER: 24W
CRI: 90
LUMEN: 1753lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: L509*W26*H32mm
BEAM ANGLE: 24°/38°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



COLOR FINISHINGS:




2ALGD0580089-12W




OTHER VERSIONS




12W 38° 5000K



12W 38° 5000K




2ALGD0580089-18W




OTHER VERSIONS




18W 38° 5000K



18W 38° 5000K




2ALGD0580089-24W




OTHER VERSIONS



24W 38° 5000K



24W 38° 5000K





8W 48V



12W 48V



18W 48V


2ALGD0580032-8W

POWER: 8W
CRI: 90
LUMEN: 620lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø34*H85mm
BEAM ANGLE: 24°/38°/60°
FINISHED COLOR: Black/White



2ALGD0580032-12W

POWER: 12W
CRI: 90
LUMEN: 967lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø45*H110mm
BEAM ANGLE: 20°/38°/60°
FINISHED COLOR: Black/White



2ALGD0580032-18W

POWER: 18W
CRI: 90
LUMEN: 1396lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø55*H140mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



RECOMMEND OTHER VERSIONS




2ALGD0580032-8W




ANGLE 38°

OTHER VERSIONS




24° 60°


8W 38° 3000K



8W 38° 3000K




2ALGD0580032-12W




ANGLE 38°

OTHER VERSIONS




24° 60°

12W 38° 3000K



12W 38° 3000K




COLOR FINISHINGS:



Black


White

2ALGD0580032-18W




ANGLE 24°

OTHER VERSIONS




15° 38° 60°

18W 24° 3000K



18W 24° 3000K





8W 48V




12W 48V



18W 48V


2ALGD0580045-8W

POWER: 8W
CRI: 90
LUMEN: 738lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø35*H90mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black




2ALGD0580045-12W

POWER: 12W
CRI: 90
LUMEN: 1073lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø45*H100mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black



2ALGD0580045-18W

POWER: 18W
CRI: 90
LUMEN: 1625lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø55*H115mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black




RECOMMEND OTHER VERSIONS



RECOMMEND OTHER VERSIONS



2ALGD0580045-8W




ANGLE 38°


OTHER VERSIONS



8W 38° 3000K



8W 38° 3000K



COLOR FINISHINGS:




Black White White+Black

OPTIONAL + HONEYCOMB:




Black White White+Black

2ALGD0580045-12W




ANGLE 38°


OTHER VERSIONS




12W 38° 3000K



12W 38° 3000K




2ALGD0580045-18W




ANGLE 38°


OTHER VERSIONS



18W 38° 3000K




18W 38° 3000K






2ALGD0580035-10W

POWER: 10W
CRI: 90
LUMEN: 739lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø47*H105mm
BEAM ANGLE: 10°-60°
FINISHED COLOR: Black/White



2ALGD0580035-20W

POWER: 20W
CRI: 90
LUMEN: 1484lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø58*H152mm
BEAM ANGLE: 10°-60°
FINISHED COLOR: Black/White




COLOR FINISHINGS:





RECOMMEND OTHER VERSIONS




2ALGD0580035-10W





ANGLE 10°-60°



2ALGD0580035-20W



ANGLE 10°-60°



2ALGD0580033-10W

POWER: 10W
CRI: 90
LUMEN: 820lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø75*H55mm
BEAM ANGLE: 15°/24°/38°/60°
FINISHED COLOR: Black/White




RECOMMEND OTHER VERSIONS






COLOR FINISHINGS:



2ALGD0580033-10W



ANGLE 38°





2ALGD0580051-10W

POWER: 10W
CRI: 90
LUMEN: 744lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø75*H80mm
BEAM ANGLE: 15°/24°/38°/45°/60°
FINISHED COLOR: Black/White



2ALGD0580051-20W

POWER: 20W
CRI: 90
LUMEN: 1590lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø80*H90mm
HOLE SIZE: /
BEAM ANGLE: 15°/24°/38°/45°/60°
FINISHED COLOR: Black/White



2ALGD0580051-30W

POWER: 30W
CRI: 90
LUMEN: 2595lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø95*H100mm
BEAM ANGLE: 15°/24°/38°/45°/60°
FINISHED COLOR: Black/White




RECOMMEND OTHER VERSIONS



RECOMMEND OTHER VERSIONS



2ALGD0580051-10W




ANGLE 24°

OTHER VERSIONS



10W 24° 3000K



10W 24° 3000K


Dist(m)	Ena(dlm)	Dx/Dx_0(m)	S_x(Sx_0lm)	Eax_0(lx)
1.0	2391.44	0.44/0.44	0.2	1041.70
2.0	597.86	0.88/0.89	0.6	260.43
3.0	265.72	1.32/1.33	1.4	115.74
4.0	149.46	1.76/1.78	2.5	65.11
5.0	95.66	2.20/2.22	3.8	41.67

Dx Beam Angle(B) > Cx, 0° V25, 0° Field angle(F) > H20, 1° V20, 0°

COLOR FINISHINGS:




2ALGD0580051-20W




ANGLE 24°

OTHER VERSIONS



20W 24° 3000K




20W 24° 3000K

Dist(m)	Ena(dlm)	Dx/Dx_0(m)	S_x(Sx_0lm)	Eax_0(lx)
1.0	3849.28	0.50/0.52	0.2	1645.75
2.0	962.32	1.09/1.05	0.9	411.44
3.0	427.70	1.57/1.57	1.9	182.86
4.0	240.58	2.10/2.09	3.4	102.86
5.0	153.97	2.62/2.61	5.4	65.83

Dx Beam Angle(B) > Cx, 0° V25, 0° Field angle(F) > H20, 1° V20, 0°

2ALGD0580051-30W




ANGLE 24°

OTHER VERSIONS



30W 24° 3000K



30W 24° 3000K

Dist(m)	Ena(dlm)	Dx/Dx_0(m)	S_x(Sx_0lm)	Eax_0(lx)
1.0	8963.71	0.39/0.39	0.1	3998.36
2.0	2245.98	0.78/0.79	0.5	999.59
3.0	996.19	1.18/1.18	1.1	444.26
4.0	561.48	1.57/1.57	2.0	249.90
5.0	359.35	1.96/1.96	3.1	159.93

Dx Beam Angle(B) > Cx, 0° V25, 0° Field angle(F) > H20, 1° V20, 0°



10W 48V



15W 48V



20W 48V

2ALGD0580030-10W

POWER: 10W
CRI: 90
LUMEN: 882lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø90*H56mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold



2ALGD0580030-15W

POWER: 15W
CRI: 90
LUMEN: 1194lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø120*H56mm
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold



2ALGD0580030-20W

POWER: 20W
CRI: 90
LUMEN: 2024lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø140*H56mm
HOLE SIZE: /
BEAM ANGLE: 110°
FINISHED COLOR: Black/White/Silver/Gold



RECOMMEND OTHER VERSIONS



RECOMMEND OTHER VERSIONS




2ALGD0580030-10W



ANGLE 110°

10W 110° 3000K



10W 110° 3000K


Dist(m)	Enadi(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(k)
1.0	321.58	2.79/2.79	6.1	60.78
2.0	80.40	5.58/5.57	24.5	15.20
2.5	51.45	6.98/6.97	38.2	9.73
3.5	26.25	9.77/9.75	74.9	4.96
4.5	15.88	12.57/12.54	123.6	3.00

2ALGD0580030-15W



ANGLE 110°

15W 110° 3000K




15W 110° 3000K

Dist(m)	Enadi(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(k)
1.0	440.79	2.76/2.75	6.0	84.55
2.0	110.20	5.52/5.49	23.8	21.14
3.0	48.98	8.27/8.24	53.6	9.39
4.0	27.55	11.03/10.99	95.3	5.28
5.0	17.63	13.79/13.73	148.9	3.38

COLOR FINISHINGS:




2ALGD0580030-20W




ANGLE 110°

20W 110° 3000K



20W 110° 3000K

Dist(m)	Enadi(lx)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(k)
1.0	720.40	2.87/2.79	6.5	131.67
2.0	181.10	5.74/5.74	25.9	32.92
2.5	115.26	7.18/7.18	40.5	21.07
3.5	58.81	10.05/10.05	79.4	10.75
4.5	35.58	12.92/12.93	131.3	6.50



2ALGD0580106-12W

POWER: 12W
CRI: 90
LUMEN: 1184lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø95*H45mm
BEAM ANGLE: 30° /60°
FINISHED COLOR: Black+Black
/Black+Gold/White+Black/White+Gold




2ALGD0580106-20W

LED POWER: 20W
CRI: 90
LUMEN: 2174lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø123*H45mm
BEAM ANGLE: 30° /60°
FINISHED COLOR: Black+Black
/Black+Gold/White+Black/White+Gold



2ALGD0580106-30W

LED POWER: 30W
CRI: 90
LUMEN: 3329lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø153*H45mm
BEAM ANGLE: 30° /60°
FINISHED COLOR: Black+Black
/Black+Gold/White+Black/White+Gold




RECOMMEND OTHER VERSIONS



RECOMMEND OTHER VERSIONS




2ALGD0580106-12W



ANGLE 90°

12W 90° 4000K



12W 90° 4000K

Dv(m)	Enax(lx)	DvDv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	720.11	1.70/1.67	2.2	219.67
1.6	281.29	2.72/2.67	5.7	85.81
2.0	180.03	3.42/3.34	8.9	54.92
2.5	119.97	4.18/4.09	13.4	36.60
3.0	80.01	5.10/5.01	20.1	24.41


Dv Beam Angle(B):H90.7° V90.7° Field angle(F):H90.4° V90.6°

COLOR FINISHINGS:



Black Black+White Black+Gold White+Gold

2ALGD0580106-20W




ANGLE 30°

OTHER VERSIONS



60°

20W 30° 4000K




20W 30° 4000K

Dv(m)	Enax(lx)	DvDv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	5503.54	0.57/0.51	0.3	2332.86
2.0	1375.89	1.13/1.14	1.0	586.21
3.0	611.50	1.70/1.71	2.3	259.21
4.0	343.97	2.27/2.28	4.1	145.80
5.0	220.14	2.84/2.85	6.4	93.31

Dv Beam Angle(B):H31.7° V31.8° Field angle(F):H30.3° V30.4°

2ALGD0580106-30W




ANGLE 30°

OTHER VERSIONS



60°

30W 30° 4000K



30W 30° 4000K

Dv(m)	Enax(lx)	DvDv_B(m)	S_B(sq.m)	Eav_B(lx)
1.0	9437.06	0.54/0.51	0.2	4041.49
1.6	3686.35	0.86/0.86	0.6	1578.71
2.0	2359.27	1.07/1.07	0.9	1010.37
2.5	1572.19	1.31/1.31	1.4	673.30
3.0	1048.56	1.61/1.61	2.0	449.05

Dv Beam Angle(B):H30.0° V30.0° Field angle(F):H30.3° V30.4°



12W 48V



18W 48V



24W 48V

2ALGD0580043-12W

POWER: 12W
CRI: 90
LUMEN: 789/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø85*W47mm
HOLE SIZE: /BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black



2ALGD0580043-18W

POWER: 18W
CRI: 90
LUMEN: 1252/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø105*W52mm
HOLE SIZE: /BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black



2ALGD0580043-24W

POWER: 24W
CRI: 90
LUMEN: 1509/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø125*W57mm
HOLE SIZE: /BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/White+Black







RECOMMEND OTHER VERSIONS



RECOMMEND OTHER VERSIONS







2ALGD0580043-12W






COLOR FINISHINGS:



2ALGD0580043-18W



2ALGD0580043-24W





6W 48V



8W 48V



15W 48V

COLOR FINISHINGS:



2ALGD0580125-8W

POWER: 8W
CRI: 90
LUMEN: 644lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø90*H85mm
BEAM ANGLE: 80°
FINISHED COLOR: White+Gold/Black+Gold



2ALGD0580125-15W


POWER: 15W
CRI: 90
LUMEN: 1164lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø120*H115mm
BEAM ANGLE: 80°
FINISHED COLOR: White+Gold/Black+Gold



RECOMMEND OTHER VERSIONS




2ALGD0580125-8W




ANGLE 80°

2ALGD0580125-15W




ANGLE 80°


8W 80° 3000K




8W 80° 3000K



15W 80° 3000K



15W 80° 3000K



2ALGD0580041-6W

POWER: 6W
CRI: 90
LUMEN: 280lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø150mm
BEAM ANGLE: 210°
FINISHED COLOR: Black/White/Gold



COLOR FINISHINGS:



RECOMMEND OTHER VERSIONS




2ALGD0580041-6W




ANGLE 210°

6W 210° 3000K



6W 210° 3000K





6W 48V



8WD120 48V



8WD150 48V



8W 48V

2ALGD0580066-6W

POWER: 6W
CRI: 90
LUMEN: 280lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø80mm
BEAM ANGLE: 235°
FINISHED COLOR: Black/White

2ALGD0580066-8WD120

POWER: 8W
CRI: 90
LUMEN: 375lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø120mm
BEAM ANGLE: 235°
FINISHED COLOR: Black/White

2ALGD0580066-8WD150

POWER: 8W
CRI: 90
LUMEN: 375lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø150mm
BEAM ANGLE: 235°
FINISHED COLOR: Black/White




COLOR FINISHINGS:



RECOMMEND OTHER VERSIONS




2ALGD0580066-6W



ANGLE 235°

6W 235° 3000K



6W 235° 3000K

Dist(m)	Enrad(°)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(°)
1.0	42.17	NA/NA	NA	NA
2.0	10.54	NA/NA	NA	NA
2.5	6.75	NA/NA	NA	NA
3.5	3.44	NA/NA	NA	NA
4.5	2.08	NA/NA	NA	NA

Dv Beam Angle(B) H235.6 V234.9 Field angle(F) H217.9 V221.6

2ALGD0580040-8W


POWER: 8W
CRI: 90
LUMEN: 664lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø110mm
BEAM ANGLE: 160°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS




2ALGD0580040-8W



ANGLE 160°

8W 160° 3000K



8W 160° 3000K

Dist(m)	Enrad(°)	Dv/Dv_B(m)	S_B(sq.m)	Eav_B(°)
1.0	129.00	16.65/7.52	160.2	1.68
1.6	50.39	26.64/12.04	410.2	0.66
2.0	32.25	33.30/15.05	640.9	0.42
2.5	21.49	40.80/18.43	961.8	0.28
3.0	14.33	49.95/22.57	1442.1	0.19

Dv Beam Angle(B) H166.3 V150.2 Field angle(F) H289.0 V216.4

COLOR FINISHINGS:





COLOR FINISHINGS:




10W 48V

10W 48V


2ALGD0580025-10W-L200/L300/L400/L500

POWER: 10W
CRI: 90
LUMEN: 815lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø34*H200mm/Ø34*H300mm/Ø34*H400mm/Ø34.5*H500mm
BEAM ANGLE: 24°/38°/60°
FINISHED COLOR: Black/White


RECOMMEND OTHER VERSIONS




2ALGD0580025-10W-L200/L300/L400/L500




OTHER VERSIONS



10W 38° 3000K




10W 38° 3000K



2ALGD0580039-10W-L200/L300

POWER: 10W
CRI: 90
LUMEN: 815lm/3000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø45*H200mm/Ø45*H300mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Black/White/Gold


RECOMMEND OTHER VERSIONS




COLOR FINISHINGS:




2ALGD0580039-10W-L200/L300




OTHER VERSIONS



10W 38° 3000K



10W 38° 3000K





8W 48V



8W 48V

25

2ALGD0580690-8W 


POWER: 8W
CRI: 90
LUMEN: 526lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø130*H305mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold+Black



RECOMMEND OTHER VERSIONS



2ALGD0580690-8W

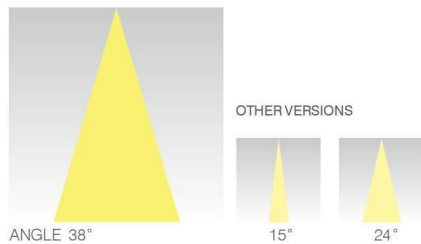

26

2ALGD0580691-8W 


POWER: 8W
CRI: 90
LUMEN: 545lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø63*H175mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold+Black




RECOMMEND OTHER VERSIONS




2ALGD0580691-8W

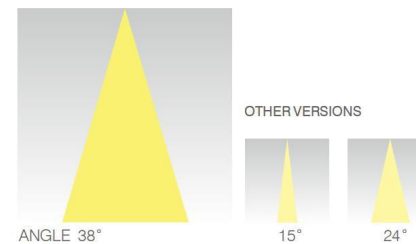

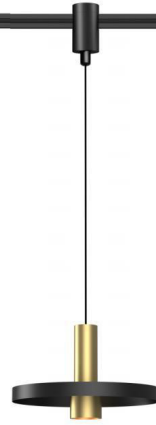


8W 48V



8W 48V

2ALGD0580692-8W 


POWER: 8W
CRI: 90
LUMEN: 545lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø280*H175mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold+Black



RECOMMEND OTHER VERSIONS



2ALGD0580692-8W



ANGLE 38°

OTHER VERSIONS




15°

24°

2ALGD0580693-8W 


POWER: 8W
CRI: 90
LUMEN: 605lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø280*H177mm
BEAM ANGLE: 15°/24°/38°
FINISHED COLOR: Gold+Black



RECOMMEND OTHER VERSIONS



2ALGD0580693



ANGLE 38°

OTHER VERSIONS




15°

24°




2ALGD0580006-20W

POWER: 20W
CRI: 90
LUMEN: 1806lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø250*H15mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White



2ALGD0580006-30W


POWER: 30W
CRI: 90
LUMEN: 2413lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: Ø350*H15mm
BEAM ANGLE: 80°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS




2ALGD0580006-20W




ANGLE 80°


20W 80° 3000K



20W 80° 3000K




2ALGD0580006-30W





ANGLE 80°

30W 80° 3000K




30W 80° 3000K

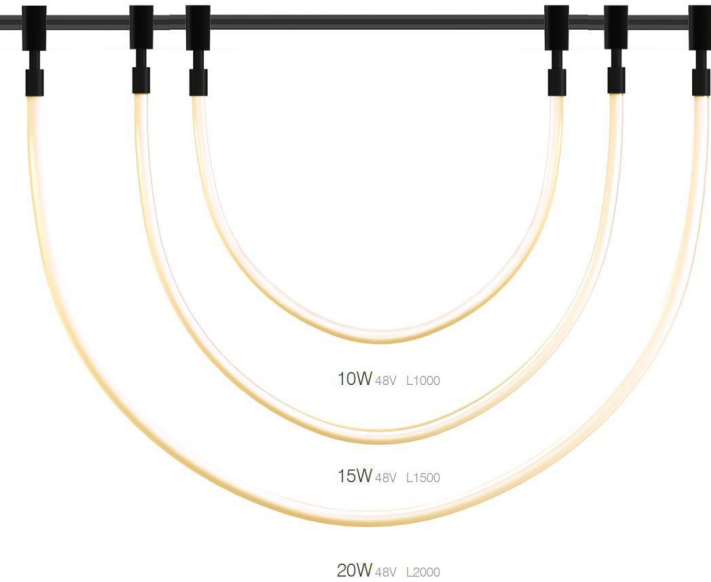

2ALGD0580060-10W


POWER: 10W
CRI: 90
LUMEN: 605lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: L1000mm
BEAM ANGLE: 360°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



2ALGD0580060-10W



ANGLE 360°

2ALGD0580060-15W

POWER: 15W
CRI: 90
LUMEN: 908lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: L1500mm
BEAM ANGLE: 360°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



2ALGD0580060-15W



ANGLE 360°

2ALGD0580060-20W

POWER: 20W
CRI: 90
LUMEN: 1212lm/4000K
CCT: 3000K/4000K/5000K
INPUT: 48V DC
DIMENSION: L2000mm
BEAM ANGLE: 360°
FINISHED COLOR: Black/White



RECOMMEND OTHER VERSIONS



2ALGD0580060-20W



ANGLE 360°